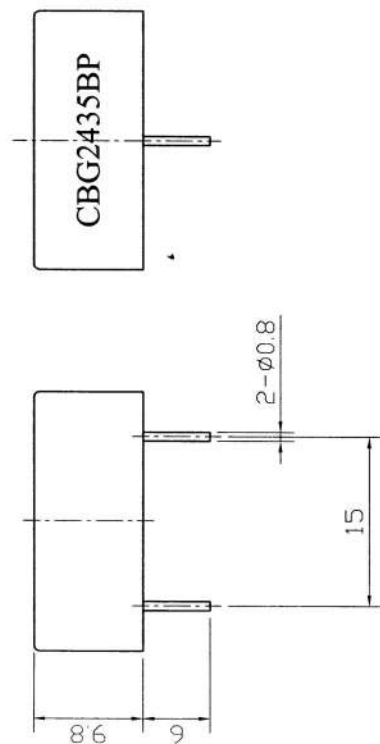


SPECIFICATION

- | | |
|---------------------------------|--------------------|
| 1.Rated Voltage | 12 VDC |
| 2.Operating Voltage | 3~24VDC |
| 3.Max.Rated Current | 8mA at 12VDC |
| 4. Resonant Frequency | 3.3±0.5KHz |
| 5.Min.Sound Pressure Level..... | 78dB at 12VDC/30cm |
| 6. Tone Nature | Continuous |
| 7.Shell Material/Color | ABS |
| 8.Operating Temperature | -20~+60℃ |
| 9.Store Temperature | -30~+70℃ |
| 10.Weight | 2.5g |

5	6	7	8
 FIRST ANGLE PROJECTION			
APPROVED			
CHECKED			
DRAWN			
DATE	APPROVALS	APPROVED	DATE
NOTED AS PER UNLESS OTHERWISE SPECIFIED			
No.	DESCRIPTION	APPROVED	DATE
KEPO NINGBO KEPO ELECTRONIC CO.,LTD. http://www.chinaacoustic.com			
Piezo Buzzer CBG2435BP		QUARTZ-1	
UNIT		DWG NO.	
mm		OEM2823	
SCALE		SHEET	
08.02.27		NOT TO SCALE	
VER		1.0	