


SPECIFICATION

1. Rated Voltage 9Vp-p Square Wave
2. Operating Voltage 3~30Vp-p Square Wave
3. Max. Rated Current 3mA/9Vp-p Square Wave/4KHz
4. Resonant Frequency 4.0 ± 0.5 KHz
5. Min. Sound Pressure Level 90dB/9Vp-p Square Wave/10cm
6. Capacitance at 100Hz $15000\text{pF} \pm 30\%$
7. Shell Material/Color ABS/Original color
8. Operating Temperature $-20 \sim +60^\circ\text{C}$
9. Store Temperature $-30 \sim +70^\circ\text{C}$
10. Weight 2.5g

备注：蜂鸣片涂绿。

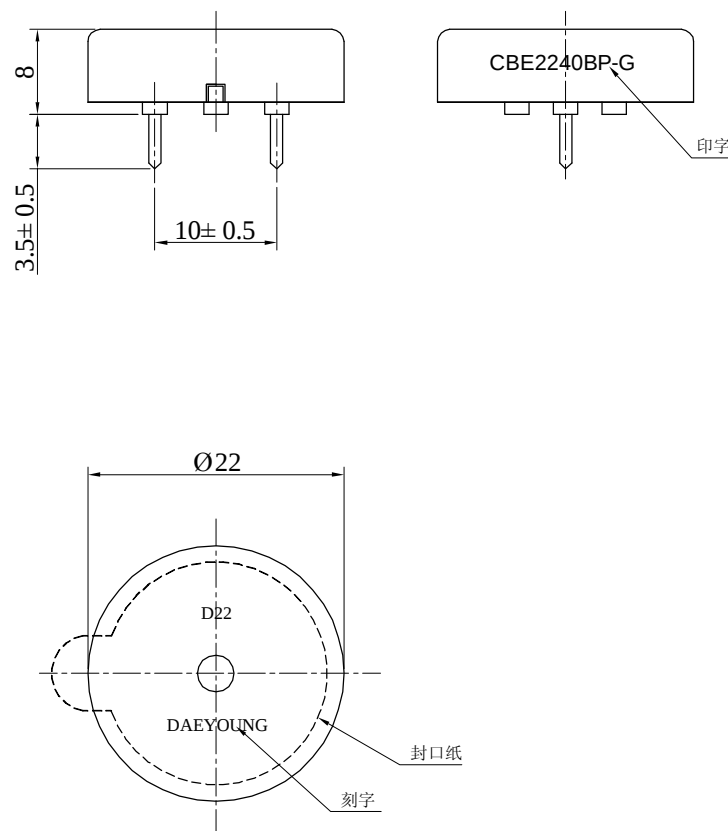

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Piezo Buzzer QUARTZ-1 LTD CBE2240BPW-G-2069			
No.	DESCRIPTION	APPROVED	DATE				
TOLERANCES UNLESS NOTED OTHERWISE: X .X .X XX .X XXX .X 90° FORMED +2° ANGLES -1° FIRST ANGLE PROJECTION 		APPROVALS		DATE			
		DRAWN				UNIT	
		CHECKED				mm	
		APPROVED		06.02.27		DWG NO.	
				SCALE		SHEET	VER 1.0