
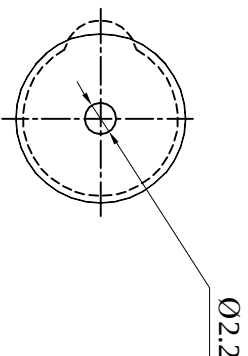

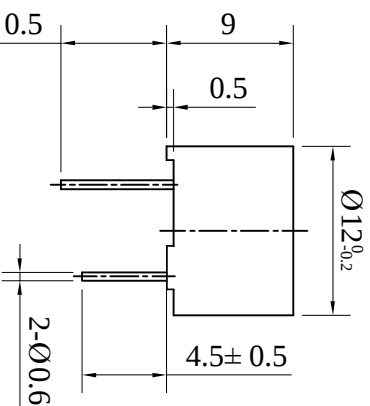


SPECIFICATION

1. Rated Voltage 12 V
2. Operating Voltage 7~16 V
3. Max. Rated Current 40mA
4. Coil Resistance $140 \pm 14 \Omega$
5. Coil Impedance 240Ω
6. Min. Sound Pressure Level 85dB/10cm
7. Resonant Frequency 2400Hz
8. Case Material PBT
9. Operating Temperature $-20 \sim +70^\circ\text{C}$
10. Store Temperature $-30 \sim +80^\circ\text{C}$
11. Weight 2g



Compliance with ROHS			
KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
Magnetic Buzzer DAPG1212A			
No.	DESCRIPTION	APPROVED	DATE
1	NO. OF OPERATING HOURS		
2	XX *		
3	XX *		
4	90° TOLERANCE		
5	TEST METHOD		
6	APPROVED	DATE	
7	WDY	06.10.05	
8	SCALE	NOT TO SCALE	
9	UNIT	mm	
10	DWG NO	OEM1858R	
11	SHEET		
12	VER	1.0	