



规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客 户: _____

PRODUCT 产 品: _____ SAW FILTER

MODEL NO 型 号: _____ HDF770AN1-F11

PREPARED 编 制: _____ CHECKED 审 核: _____

APPROVED 批 准: _____ D A T E 日 期: _____ 2012-11-13


客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

更改历史记录
History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

1. DIMENSION

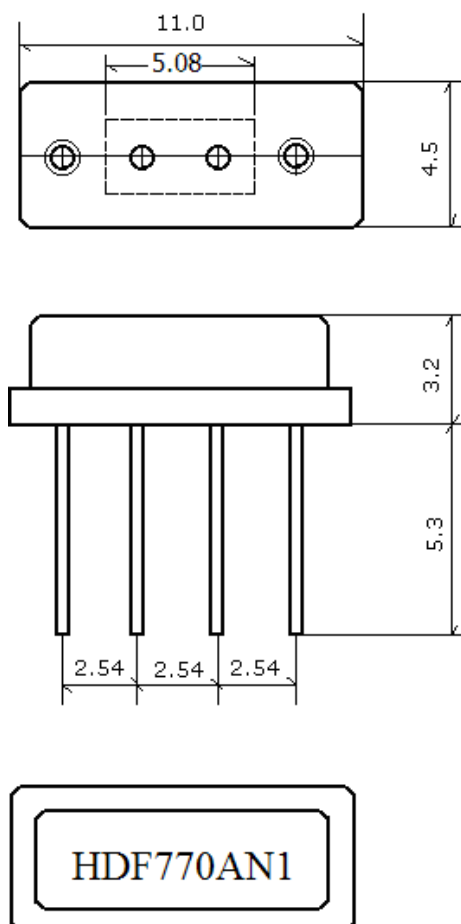


2. ELECTRICAL SPECIFICATION

DC Voltage VDC	10V
Storage Temperature Range	-40°C to +85°C
Operation Temperature Range	-40°C to +85°C
RF Power	10dBm


2-1. Electrical characteristics

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	770	-
Insertion Loss (In Fc +/- 1.5 MHz)	dB		2.5	4.0
Amplitude Ripple (In Fc +/- 1.5 MHz)	dB		0.5	1.5
Relative Attenuation				
0.3 MHz ~ 740 MHz		40	45	
740 MHz ~ 762 MHz	dB	18	25	-
777 MHz ~ 800 MHz		18	25	
800 MHz ~ 1000 MHz		35	45	
Input/Output Impedance	Ohms		50	

2-2. Typical frequency response

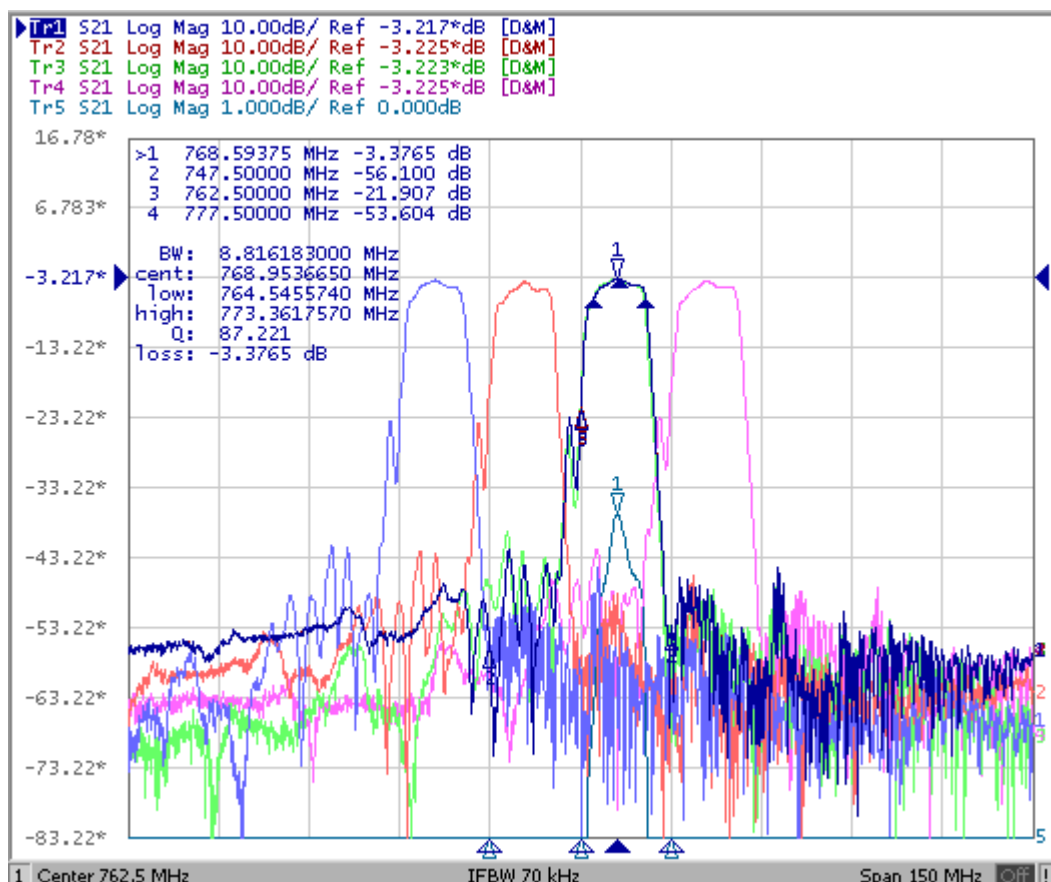

3. TEST CIRCUIT

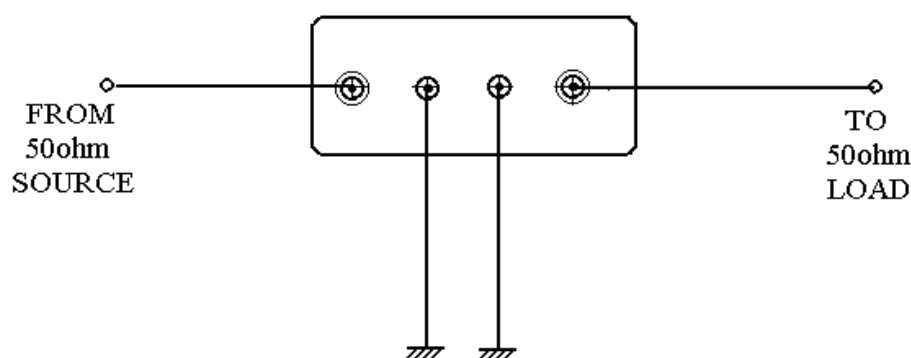

4. ENVIRONMENTAL CHARACTERISTICS

4-1 Temperature cycling

Subject the device to a low temperature of -40°C for 30 minutes. Following by a high temperature of $+25^{\circ}\text{C}$ for 5 Minutes and a higher temperature of $+85^{\circ}\text{C}$ for 30 Minutes. Then release the device into the room conditions for 1 to 2 hours prior to the measurement. It shall meet the specifications in 2-2.

4-2 Resistance to solder heat

Submerge the device terminals into the solder bath at $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 10 ± 1 sec.

Then release the device into the room conditions for 4 hours. It shall meet the specifications in 2-2.

4-3 Solderability

Submerge the device terminals into the solder bath at $245^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 5s, More than 95% area of the soldering pad must be covered with new solder. It shall meet the specifications in 2-2.

4-4 Mechanical shock

Drop the device randomly onto the concrete floor from the height of 1 m 3 times. the filter shall fulfill the specifications in 2-2.

4-5 Vibration

Subject the device to the vibration for 2 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 hz. The filter shall fulfill the specifications in 2-2.

5. REMARK

5.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

5.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

5.3 Soldering

Only leads of component may be soldered. Please avoid soldering another part of component.