


SPECIFICATION

| | |
|---------------------------------|-------------------|
| 1.Rated Voltage | 6VDC |
| 2.Operating Voltage | 4~8VDC |
| 3.Max.Rated Current | 15mA at 6VDC |
| 4.Resonant Frequency | 4.8 ± 0.5 KHz |
| 5.Min.Sound Pressure Level..... | 85dB at 6VDC/30cm |
| 6.Tone Nature | Continuous |
| 7.Shell Material | ABS |
| 8.Operating Temperature | -20~+60°C |
| 9.Store Temperature | -30~+70°C |
| 10.Weight | 6g |

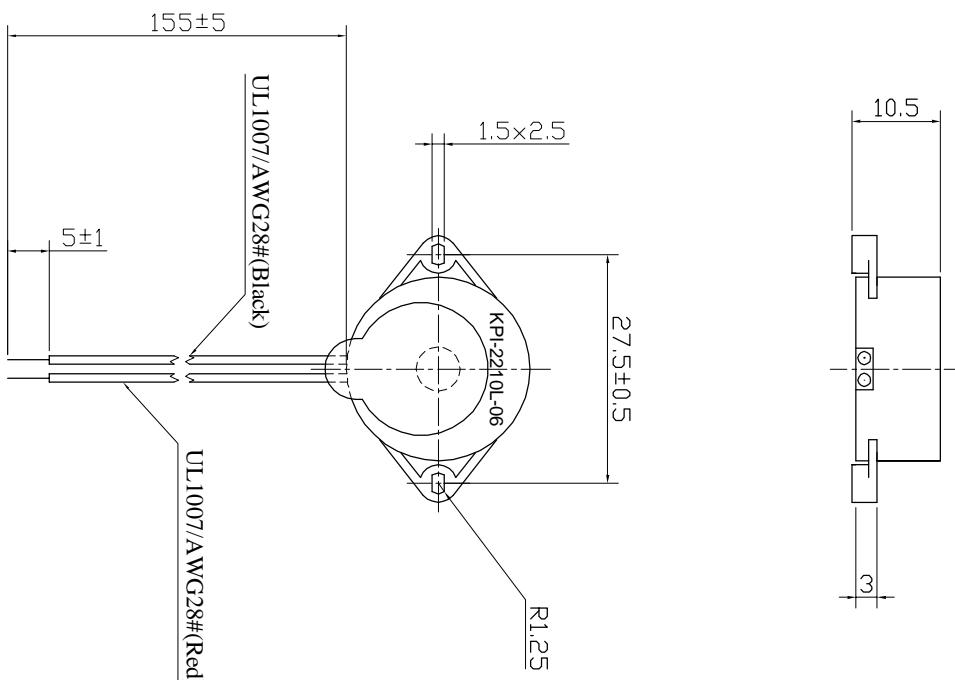

Red(红).....Positive(+)
Black(黑).....Negative(-)

KEPO NINGBO KEPOL ELECTRONIC CO.,LTD
<http://www.chinacoustic.com>

KEPO NINGBO KEPO ELECTRONIC CO.,LTD

Piezo Buzzer QUARTZ-1 LTD
KPI-2210L-06-1872

| | | | | | | | |
|---|----------|----------|-------------|-------|---------|------------|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| PART NO: CLAS NO: FIRE ANGLE WORKSHOP | APPROVED | 06.01.23 | SCALE mm | SHEET | OEM16/2 | VER 1.1 | |