

NXE 49/U-S SMD Crystal Unit



{Features}

- Low cost
- Industry standard package
- High reliability and stability crystal
- Wide frequency range and calibration tolerances available
- Rohs compliant / Pb free

Application of Crystal:

- Best choice for mother board
- USB
- LAN card
- Router
- Switch



Electrical Specification:

Model	NXE
Frequency Range	3.579545 ~ 100.000 MHz
Frequency Tolerance at 25 °C ± °C	±0 ~ ±50 ppm (TYP.)
Frequency Stability Over Operating Temp Range	±0 ~ ±50 ppm (TYP.)
Operating Temp Range	-10 °C ~ +60 °C, -20 °C ~ +70 °C or customer requirement
Load Capacitance	8 pF ~ 32 pF, series or special
Drive Level	0.1uW ~ 1000uW (TYP.: 100uW)
Insulation Resistance	500MΩ min / DC 100V ±5V
Soldering Reflow Profile	255 °C ±10 °C 8sec. max
Case Material	Low profile type
Oscillation Mode	Fundamental, 3rd overtone
Measure Instrument	S&A 250B


Equivalent Series Resistance(ESR) VS Frequency:

Frequency (MHz)	Oscillation Mode	NXE
3.57 ~ 3.79	Fundamental	180 Ω max.
3.8 ~ 4.49	Fundamental	150 Ω
4.5 ~ 5.99	Fundamental	120 Ω
6.0 ~ 7.99	Fundamental	100 Ω
8.0 ~ 9.99	Fundamental	80 Ω
10.0 ~ 11.99	Fundamental	70 Ω
12.0 ~ 15.99	Fundamental	60 Ω
16.0 ~ 19.99	Fundamental	50 Ω
20.0 ~ 39.99	Fundamental	40 Ω
26.0 ~ 39.99	3rd overtone	100 Ω
40.0 ~ 70.0	3rd overtone	80 Ω
70.0 ~ 100.0	3rd overtone	100 Ω


* Above specification subject to change without prior notice, please consult our sales representative for more information @ www.nsk.com.tw

Для заказа отправьте заявку на почту: mail@kvarci.ru


Dimensions (mm):

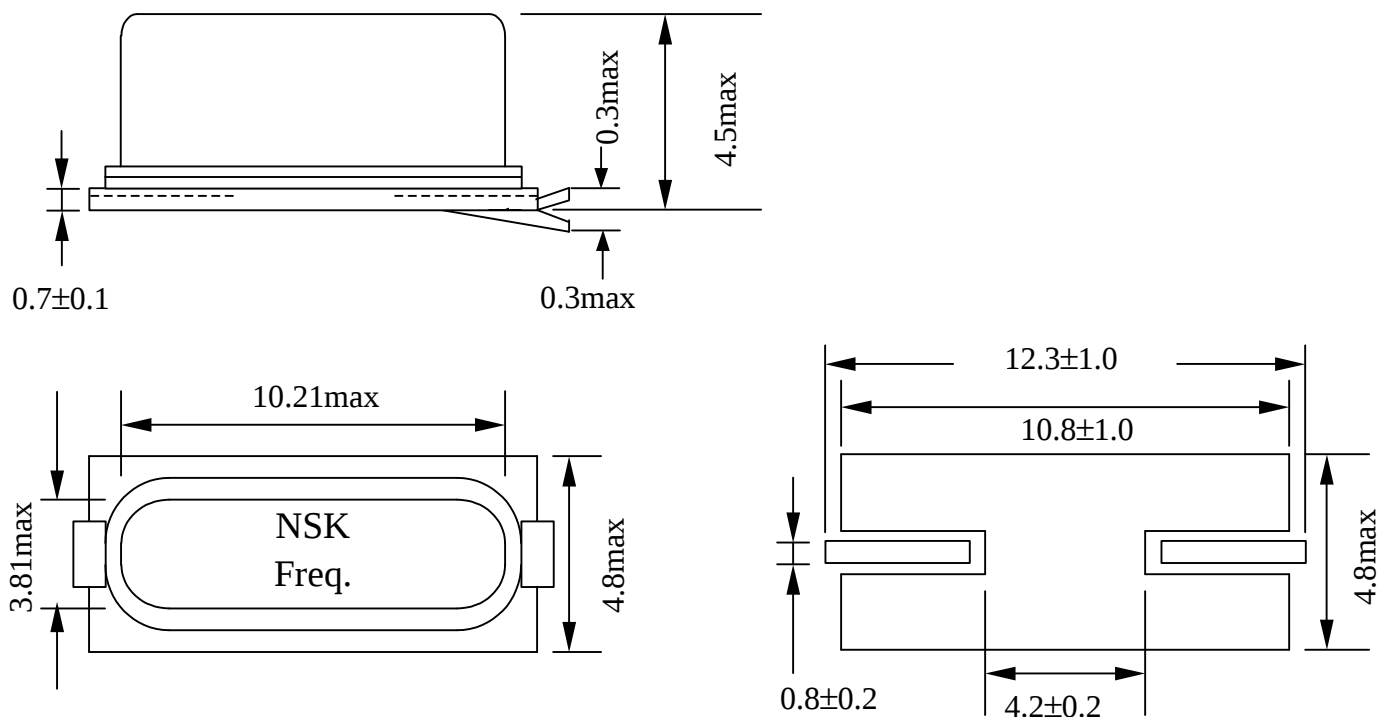

Land pattern (reference):

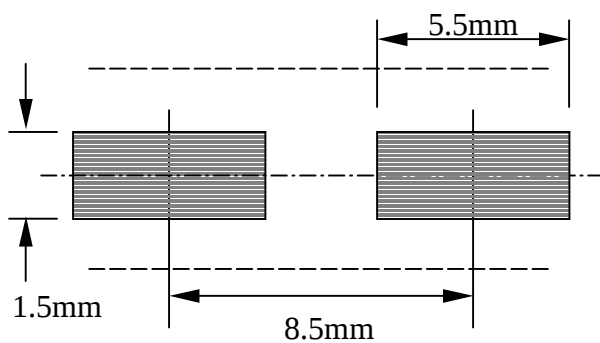

Reflow Temperature Profile:

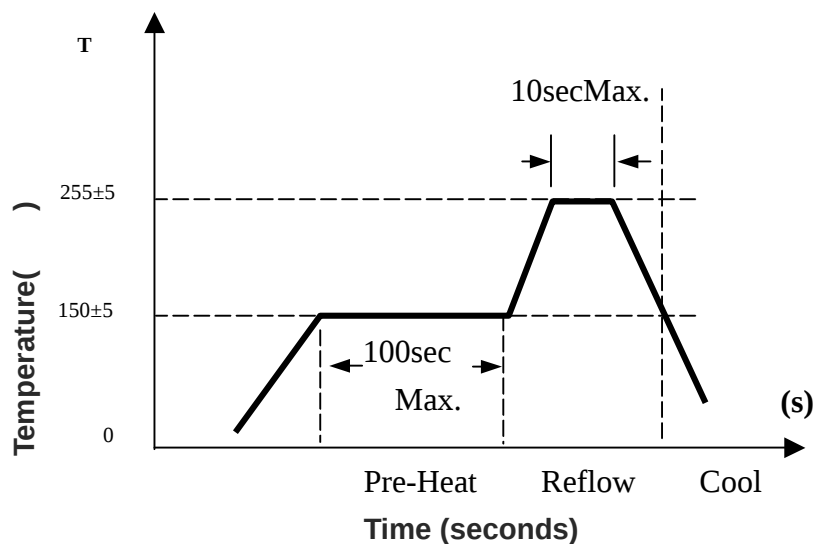

* Above specification subject to change without prior notice, please consult our sales representative for more information @ www.nsk.com.tw

Для заказа отправьте заявку на почту: mail@kvarci.ru