Купить данную позицию можно на сайте: https://kvarci.ru/

S2520 SMD Type Crystal

Features

Ultrathin thickness 0.55mm.
It is a completely sealed type with a metal case sealed on a ceramic board.
Automatic mounting is possible.
Reflow is possible.
RoHS compliant and lead free.

Frequency Range 频率范围	12.000MHz ~ 80.000MHz
Mode of Oscillation 振荡模式	Fundamental
Frequency Tolerance at 25℃ 频率公差	±10ppm, ±30ppm,or specify
Frequency Stability Over Temperature 频率温度公差	±10ppm, ±30ppm,or specify
Operating Temperature Range 工作温度	-10 ~ +60℃ standard,or -40 ~ +85℃ Extended
Aging 年老化特性	± 2ppm / year ,± 5ppm / year
Load Capacitance 负载电容	9pf,12pf,or specify
Equivalent Series Resistance（ESR） 等效电阻	See Table
Shunt Capacitance 静态电容	5.0pf Max
Drive Level 驱动功率	100μW Max
Reflow Conditions 回流焊条件	260℃ For 10s Max，2 Reflows Max

Resistance of Series Resonance （ESR）等效电阻		
Frequency（MHz）	Mode	ESR
12.000 ~15.000	Fundamental	180 ohms max.
16.000 ~20.000	Fundamental	150 ohms max.
21.000 ~30.000	Fundamental	100 ohms max.
31.000 ~80.000	Fundamental	60 ohms max.

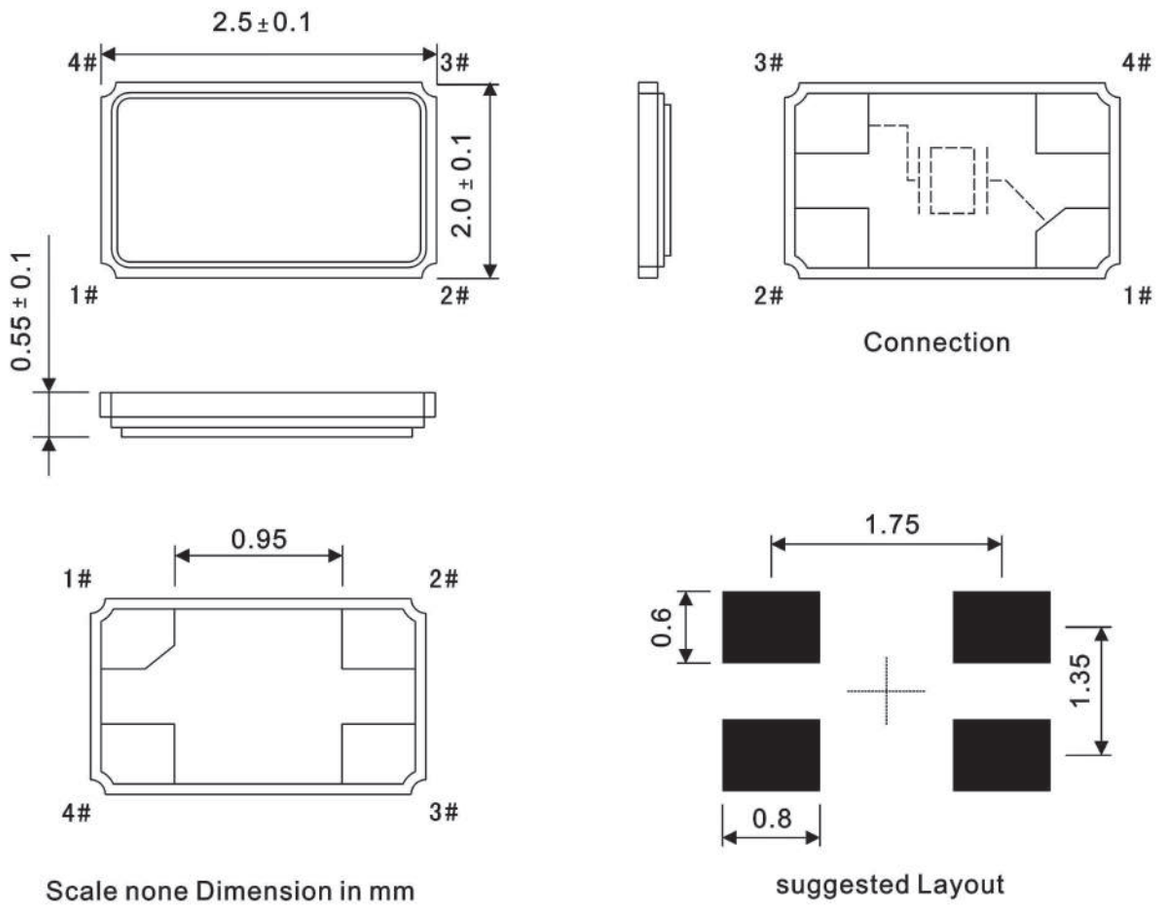

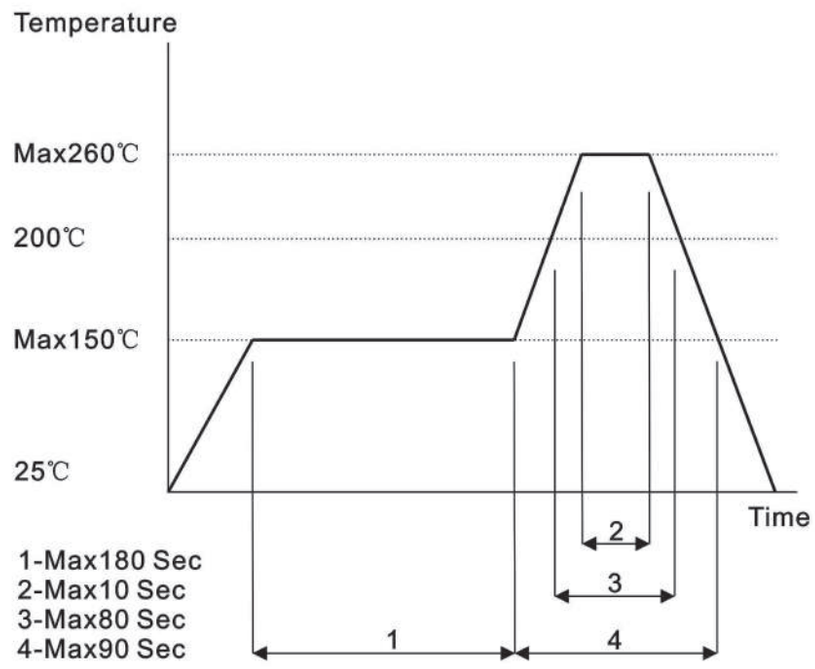

Strong Electronics&Technology Limited
Tel: 86-755-84528985 Fax:86-755-84528986
Email:sales@strongelectronics.net
www.sawfilter.cn

Для заказа отправьте заявку на почту: mail@kvarci.ru