



宁波福爱斯电子有限公司
NINGBO VOISE ELECTRONICS CO.,LTD.

Tel:0086-0574-87471601

Fax:0086-0574-87471600

SPECIFICATION

FOR APPRONAL

Customer : _____

Product Name : SMD Buzzer _____

Model Name : VS1325D _____

Drawing No. : VS20181215018 _____

Signature of Voise

Approved by	Checkde by	Issued by	Date



福爱斯电子有限公司
VOISE ELECTRONICS CO.,LTD.

Office Add:Haoyangguang B-302# No.968 Baizhang Road,Ningbo China

Factory add: Shishan Industrial Park Moushan Town Yuyao City China

Tel:86-0574-87471601 Fax:86-0574-87471600 P.C.315040

Http://www.nbvoise.com E-mail:sales@nbvoise.com



Specification for SMD Buzzer		Page	2/8
Model No.: VS1325D		Revision No.	1.0
		Drawing No.	VS20181215018

Table of contents

1. Revision
2. Scope
3. General Characteristics
4. Electrical and Acoustic Characteristics.
5. Reliability Test
6. Measurement Method & Frequency Response curve
7. Recommended temperature profile for reflow oven
8. Recommended land pattern
9. Dimensions
10. Packing

1. Revision

Rev.No	Date	Page	Description of Revision
1.0	2018/12/15		Preliminary



Specification for SMD Buzzer		Page	3/8
Model No.: VS1325D		Revision No.	1.0
		Drawing No.	VS20181215018

2. Scope

This product specification is applied to the Magnetic Buzzer in alarm systems. Please contact us when using this product for any other applications than described in the above.

3. General Characteristics

- 3.1 Dimension : 12.8x12.8 mm
- 3.2 Height : 2.5 mm
- 3.3 Weight : 0.5 g
- 3.4 Operating Temperature : -40~+120℃ without loss of function
- 3.5 Store Temperature : -40~+120℃ without loss of function
- 3.6 Environmental protection rule :RoHS

4. Electrical and Acoustic Characteristics.

Test condition :15 ~ 35 °C Temp., 45% ~ 85% RH,86~106 kPa Refer to IEC60268-1


No	Items	Specification
1	Rated Voltage	5 Vp-p
2	Operating Voltage	1-25Vp-p
3	Max Current Consumption	5 mA at 5Vp-p/Square Wave/4.1kHz
4	Min Sound Pressure Level	80dB at 10cm 5Vp-p/4.1kHz, Square wave
5	Capacitance	16000± 30%pF at 120Hz
6	Resonant Frequency	4100± 500Hz
7	Housing Material	LCP
8	Color	Black
9	Pad plating	Sn



Specification for SMD Buzzer		Page	4/8
Model No.: VS1325D		Revision No.	1.0
		Drawing No.	VS20181215018

5. Reliability Test

After test(1~5item), the buzzer S.P.L . difference shall be within $\pm 10\text{dB}$, and the appearance not exist any change to be harmful to normal operation

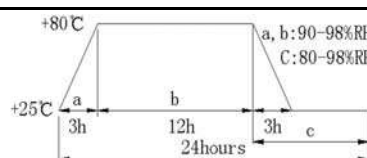No	Items	Specification
1	High Temp.Test	After being placed in a chamber at $+85\pm 2^\circ\text{C}$ for 100h and then being placed in natural condition for 4h, and then check.
2	Low Temp.Test	First being placed in a chamber at $-40\pm 2^\circ\text{C}$ for 100h and then being placed in natural condtion for 4h, and then check.
3	Temp./Humidity Test	The buzzer shall be subjected to 5 cycles One cycle shall be 24 huors and consist of and then being placed in natural for 4h ,and then check. 
4	Thermal Shock Test	After being worked in a chamber at $+80\pm 2^\circ\text{C}$ for 0.5 hour, then sounder shall be placed in a chamber at $-30\pm 2^\circ\text{C}$ for 0.5 hour(1 cycle is the below diagram).The test duration is for 10 cycle.after being placed in natural condition for 4 hour.and then check.
5	Vibration Test	Being applied vibration of amplitude of 1.5mm with 10-55Hz band of vibration frequency,X.Y.Z.3 direction.2 hours each, total 6 hours.
6	Drop Test	Free drop fram 0.75 meter height to a board 40mm thick hard wood board 3 times in axes X.Y.Z. and be nothing mechanical damage. tatol 9 times.
7	Solderability	Lead terminals are immersed in solder bath of $+300\pm 5^\circ\text{C}$ for 3 ± 1 seconds.95% surface of lead pads must be covered with fresh solder.
8	Soldering Heat Resistance	The product is followed the reflow temperation curve to test its reflow thermostability.No interference in operation.
9	Terminal Strength Pulling	Lead pads shall be soldered on the pc board, and the force 9.8N(1.0kg) shall be applied behaind the part for 10 seconds.No damage and cutting off.
10	Continuous life test	The part shall be subjected to 72 hours at $+65^\circ\text{C}$ with 5V Vp-p, 4000Hz applied.after being placed in natural condition for 1000 hour.and then check. The SPL shall be within $\pm 10\text{dB}$.
11	Intermittent life test	A duty cycle of 1 minute on, 1 minute off, a minimum of 5000 times at room temp.($25\pm 10^\circ\text{C}$) with 3V Vo-p, 4000Hz applied. after being placed in natural condition for 4 hour.and then check. The SPL shall be within $\pm 10\text{dB}$.





宁波福爱斯电子有限公司
NINGBO VOISE ELECTRONICS CO.,LTD.

Tel:0086-0574-87471601

Fax:0086-0574-87471600

Specification for SMD Buzzer		Page	5/8
Model No.: VS1325D		Revision No.	1.0
		Drawing No.	VS20181215018

6. Measurement Method & Frequency Response curve

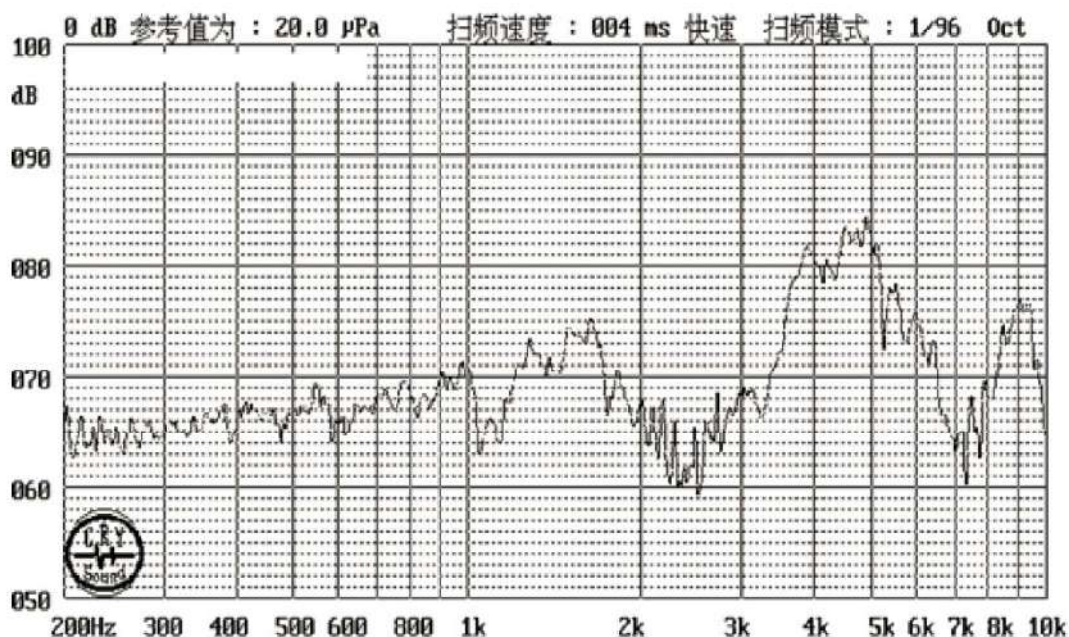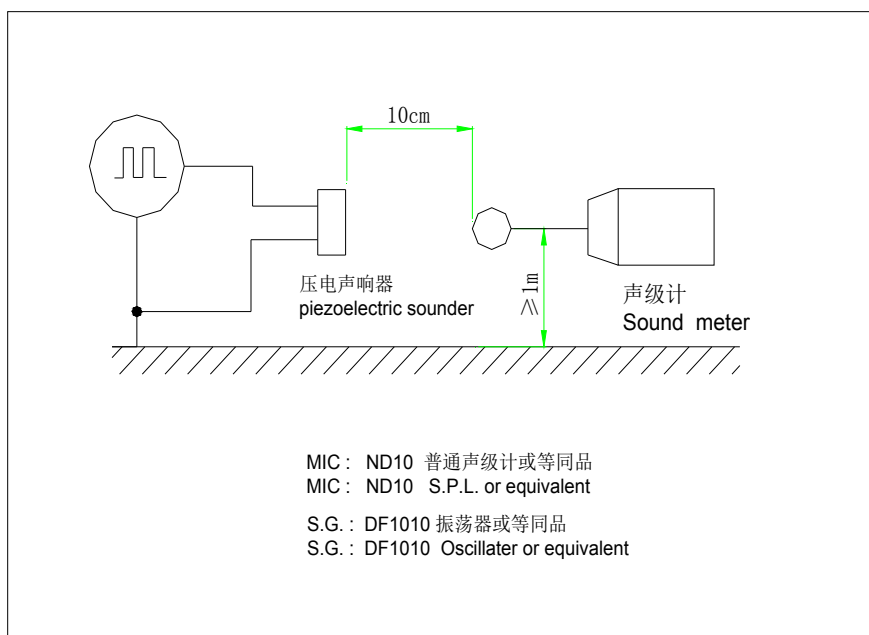




宁波福爱斯电子有限公司
NINGBO VOISE ELECTRONICS CO.,LTD.

Tel:0086-0574-87471601


Fax:0086-0574-87471600

Specification for SMD Buzzer		Page	6/8
Model No.: VS1325D		Revision No.	5/8
		Drawing No.	0

7. Recommended temperature profile for reflow oven

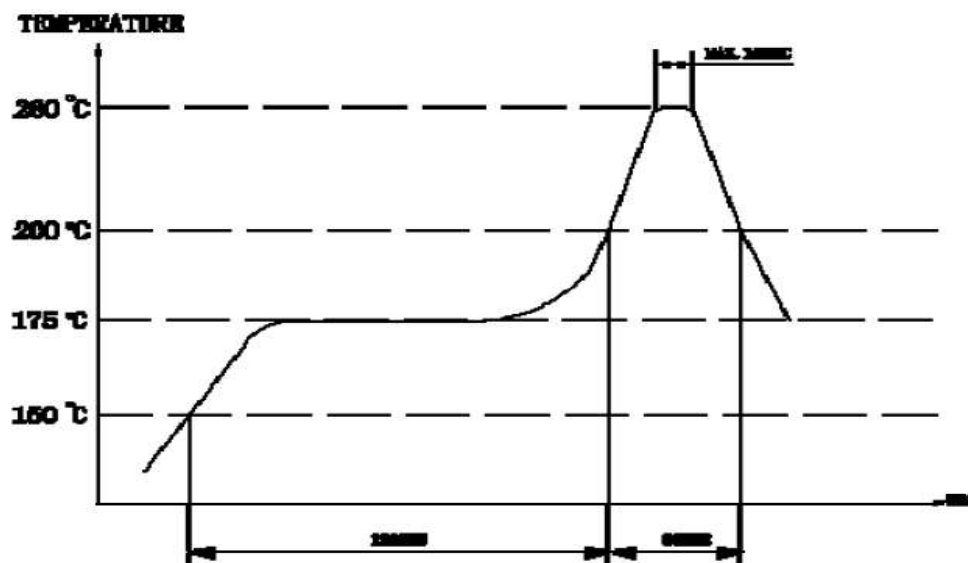

8. Recommended land pattern

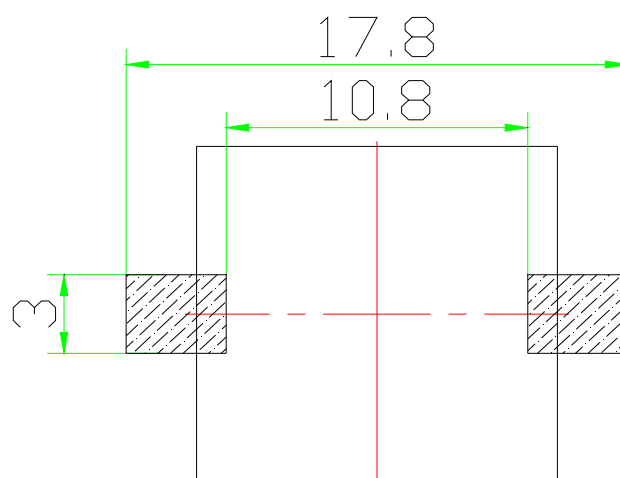




宁波福爱斯电子有限公司
NINGBO VOISE ELECTRONICS CO.,LTD.

Tel:0086-0574-87471601

Fax:0086-0574-87471600

Specification for SMD Buzzer		Page	7/8
Model No.: VS1325D		Revision No.	1.0
		Drawing No.	VS20181215018

9. Dimensions

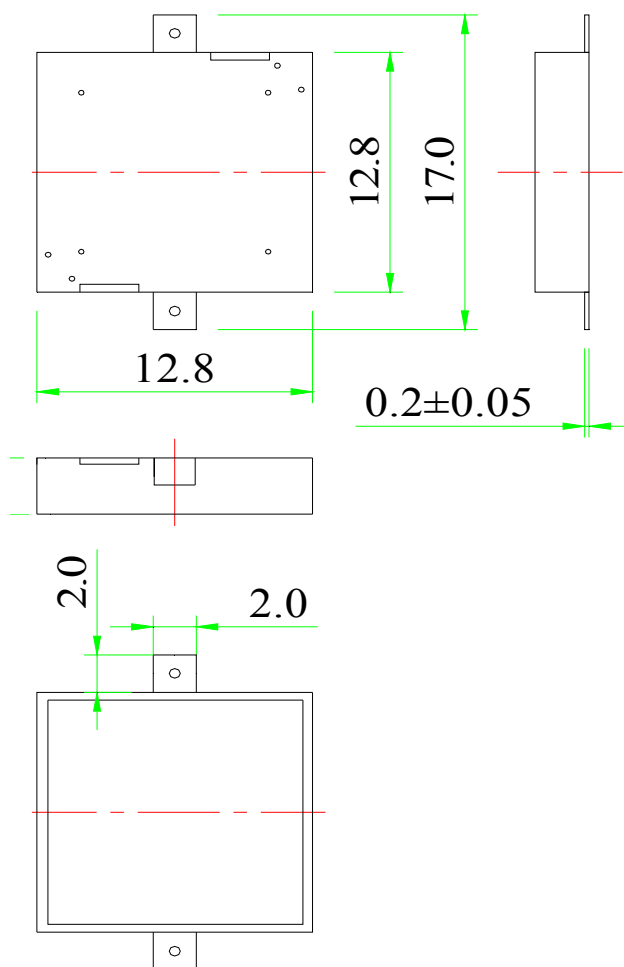

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ±0.2






宁波福爱斯电子有限公司
NINGBO VOISE ELECTRONICS CO.,LTD.

Tel:0086-0574-87471601

Fax:0086-0574-87471600

Specification for SMD Buzzer		Page	8/8
Model No.: VS1325D		Revision No.	1.0
		Drawing No.	VS20181215018

10. Packing

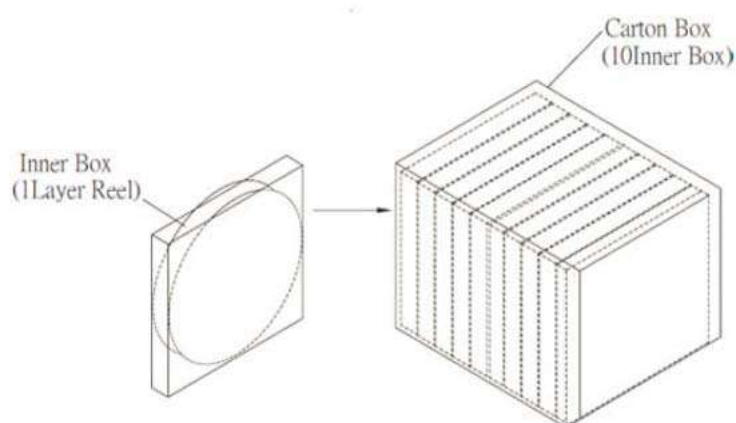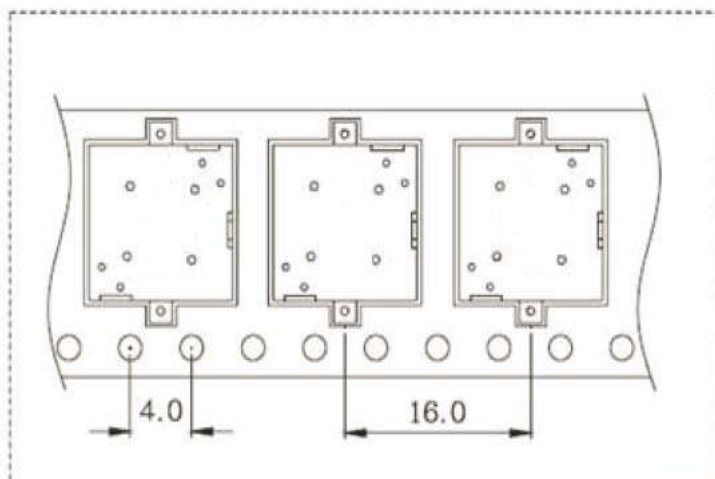

1000 pcs per Reel

10 inner box for unit, 10 units per carto

Total: 10000 pcs per carton

Size: 350X350X370mm