



SPEC NO.: CR-002HDIP

Specification

TO:STE508

Model Name: Ceramic Resonator

PART NO: ZTB912J

CUSTOMER PART NO.:

Approval sheet:

Approved	Yes
	No.
Customer's comments are welcomed here.	
Pls return this copy as a certificate of your approval by Fax.	
Approved By	Date: _____

STRONG ELECTRONICS&TECHNOLOGY LIMITED

Tel:86-755-84528985 Fax: 86-755-84528986

Email:info@strongelectronics.net

www.sawfilter.cn

History Record

Date	Part No.	SPEC No.	Description.	Remarks.
	<u>ZTB912J</u>			
<div style="background-color: #90EE90; padding: 2px; display: inline-block;"> RoHS Compliant Lead free Lead-free soldering </div>	ISO9001:2000 ISO14001:2004	Approved by	Check by	Design by
		May-15-2007	May-10-2005	Jan-16-1999
Reversions	Total Page	<i>Xu gang dong</i>	<i>Liu jun</i>	<i>Wang hon</i>

SPECIFICATION

1. SCOPE

This specification shall cover the characteristics of the ceramic resonator with the type ZTB912J.

2. PART NO.:


PART NUMBER	CUSTOMER PART NO	SPECIFICATION NO
ZTB912J		

3. OUTLINE DRAWING AND DIMENSIONS:

3.1 Appearance: No visible damage and dirt.

3.2 Construction: Leads are soldered on electrode and body is molded by resin.

3.3 Dimensions:

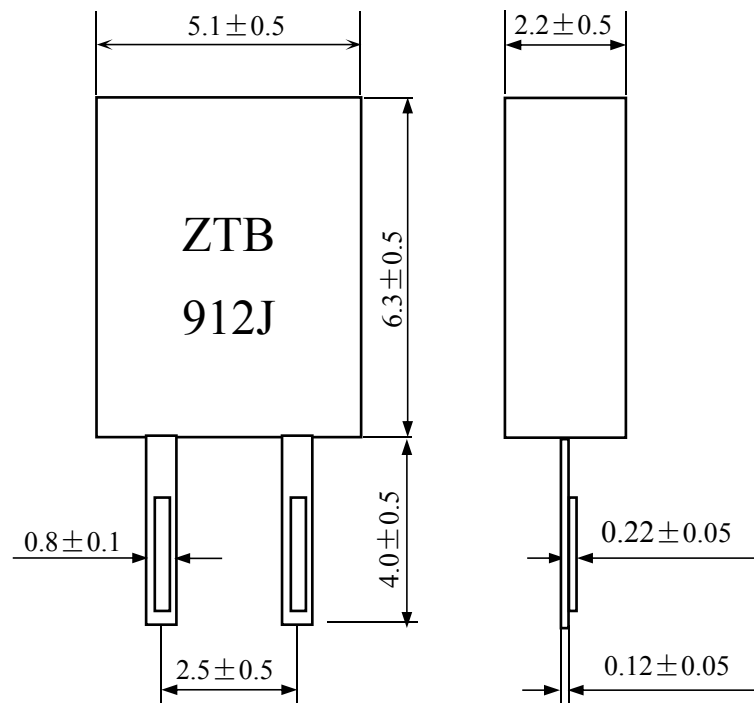

UNIT: mm


4. ELECTRICAL SPECIFICATIONS:

Oscillation Frequency Fosc (kHz)	912
Frequency Accuracy (%)	±0.5
Resonant Impedance Ro (Ω) max	70
Temperature Coefficient of Oscillation Frequency (%) max	±0.3 (Oscillation Frequency drift, -25°C ~ +85°C)
Rating Voltage UR (V) max	6VDC 15Vp-p
Withstanding Voltage	50VDC, 1min
Insulation Resistance Ri, (MΩ) min	100 (100V, 1min)
Operating Temperature Range (°C)	-20 ~ +80
Storage Temperature Range (°C)	-40 ~ +85
Aging Rate (%) max	±0.3 (For Ten Years)

5. MEASUREMENT:

5.1 Measurement Conditions: Parts shall be measured under a condition (Temp.: 20±15°C, Humidity : 65±20% R.H.) unless the standard condition (Temp.: 25±3°C, Humidity : 65±5% R.H.) is regulated to measure.

5.2 Test Circuit:

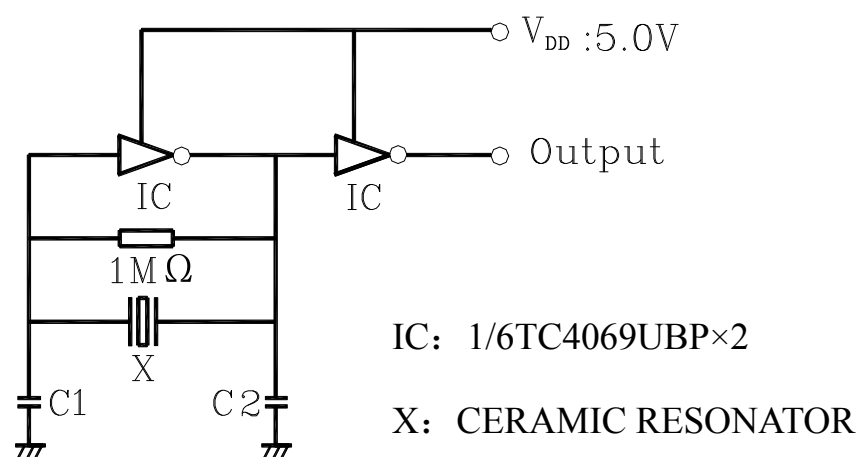

6. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

No	Item	Condition of Test	Performance
----	------	-------------------	-------------

			Requirements
6.1	Humidity	Subject the resonator at $+40 \pm 2 \text{ }^\circ\text{C}$ and 90%-95% R.H. for 96 hours, resonator shall be measured after being placed in natural conditions for 1 hour.	It shall fulfill the specifications in Table 1.
6.2	High Temperature Exposure	Subject the resonator to $+85 \pm 5 \text{ }^\circ\text{C}$ for 96 hours, resonator shall be measured after being placed in natural conditions for 1 hour.	It shall fulfill the specifications in Table 1.
6.3	Low Temperature Exposure	Subject the resonator to $-25 \pm 5 \text{ }^\circ\text{C}$ for 96 hours, resonator shall be measured after being placed in natural conditions for 1 hour.	It shall fulfill the specifications in Table 1.
6.4	Temperature Cycling	Subject the resonator to $-25 \text{ }^\circ\text{C}$ for 30 min. followed by a high temperature of $+85 \text{ }^\circ\text{C}$ for 30 min. Cycling shall be repeated 5 times. Resonator shall be measured after being placed in natural conditions for 1 hour.	It shall fulfill the specifications in Table 1.
6.5	Vibration	Subject the resonator to vibration for 2 hours each in x y and z axis with the amplitude of 1.5mm, the frequency shall be varied uniformly between the limits of 10Hz-55Hz and then resonator shall be measured.	It shall fulfill the specifications in Table 1.
6.6	Mechanical Shock	Resonator shall be measured after 3 times' random dropping from the height of 70cm on concrete floor.	No visible damage and it shall fulfill the specifications in Table 1.
6.7	Resistance to Soldering Heat	Lead terminals are immersed up to 2 mm from resonator's body in soldering bath of $260 \pm 5 \text{ }^\circ\text{C}$ for 5 ± 1 seconds and then resonator shall be measured after being placed in natural conditions for 1 hour	It shall fulfill the specifications in Table 1.
6.8	Solderability	Lead terminals are immersed up to 2mm from resonator's body in soldering bath of $235 \pm 5 \text{ }^\circ\text{C}$ for 2 ± 0.5 sec.	More than 95% of the terminal surface of the resonator shall be covered with fresh solder.

6. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

(Continued from the preceding page)

No	Item	Condition of Test	Performance Requirements
----	------	-------------------	--------------------------

6.9	Terminal Strength		No visible damage and it shall fulfill the specifications in Table 1.
6.9.1	Terminal Pulling	Force of 5N is applied to each lead in axial direction for 10 ± 1 sec.	
6.9.2	Terminal Bending	When force of 5N is applied to each lead in axial direction, the lead shall be folded up 90° from the axial direction and folded back to the axial direction. The speed of folding shall be each 3 seconds.	

Table 1

Item	Specification after test
Oscillation Frequency Change $\Delta F_{osc}/F_{osc}$ (%) max	± 0.3 (Refer to the initial value)

Note : The limits in the above table are referenced to the initial measurements.

7. REVIEW OF SPECIFICATIONS

When something gets doubtful with this specifications, we shall jointly work to get an agreement.