

Voltage Controlled Crystal Oscillator (VCXO)


电压控制晶体振荡器

LOW FREQUENCY VCXO

High speed CMOS
High reliability and precision
Set top box
ADSL Modem



DIMENSIONS(Unit:mm) 外形尺寸

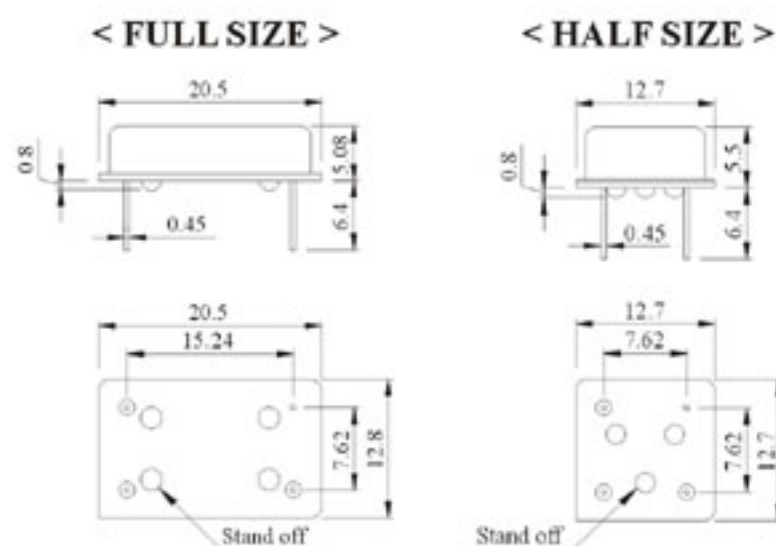

PARAMETERS 技术参数 (FVO 10 Series)


ELECTRICAL SPECIFICATIONS

Frequency Range 频率范围	1.000MHz to 35.999MHz		
Frequency Stability 频率稳定度	±25ppm	±50ppm	±100ppm (Standard)
	Inclusive of operating temperature range		
Operating Temperature Range	0°C~+70°C		
Storage Temperature Range	-40°C~+85°C		
Input Voltage 输入电压	+5Vdc ± 0.5V		+3.3Vdc ± 0.3V
Input Current 输入电流	30mA max.		20mA max.
0/1 Level 0/1 电平	+0.5V max./+4.5V min.		+0.4V max./+3.0V min.
Pull Ability 压控范围	±100ppm min. (Typical) (At 2.5Volt 2V)		±100ppm min. (Typical) (At 1.65Volts 1.35V)
Linearity 线性度	±10% max. (Typical)		±10% max. (Typical)
Symmetry 占空比	60/40% or 40/60% (Typical)		
Rise & Fall time 上升时间/下降时间	10nS max.		
Start up time 起振时间	10mS max.		
Fan out 输出负载	15pF//10TTL		
Aging (at 25 °C) 年老化率	± 5ppm / Year max.		

ENVIRONMENTAL & MECHANICAL SPECIFICATIONS


Shock 抗冲击性能	FIL-STD-883C, Method 2002, Condition B
Vibration 抗振性能	FIL-STD-883C, Method 2007, Condition A
Solderability 焊接性能	FIL-STD-883C, Method 2003
Seal Integrity 密封性能	FIL-STD-883C, Method 1014, Condition C & A2
Marking 标记	FIL-STD-883C, Method 215

TEST CIRCUIT 测试原理图

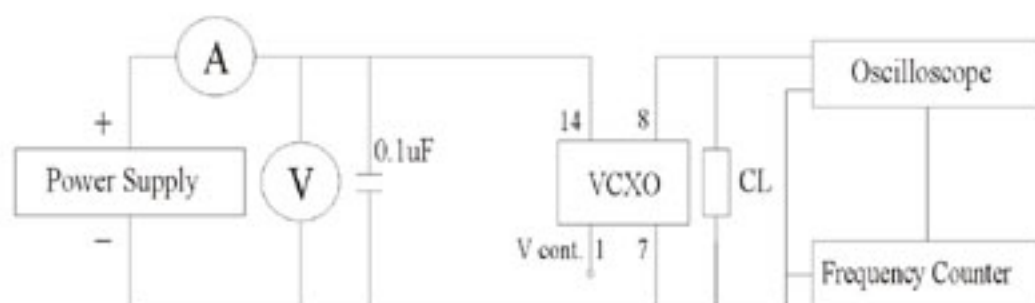

NOTES : CL ... 15pF INCLUDES ALL STRAY AND SCOPE/FREQ CTR. LOADING CAPACITANCE

PART NUMBER GUIDE 部件号示例

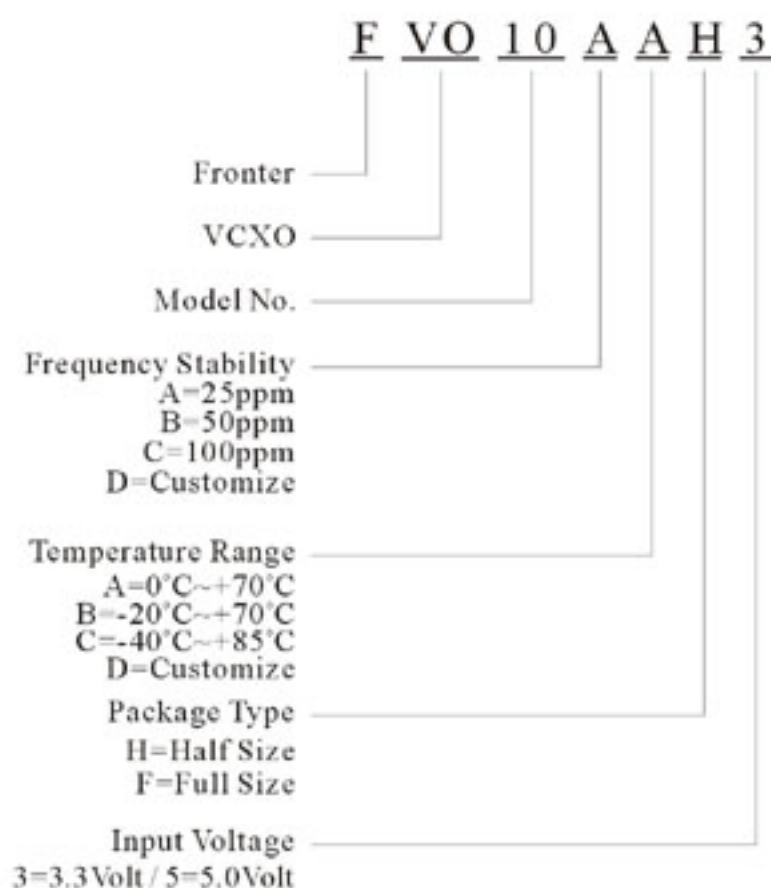

Specifications subjects to change without notice
& if you need other specifications, please contact
our factory.

WAVE FORM 波形图

